

# RAPPLON® Elastic Belts



Easy installation and safe tracking is our solution.

Ammeraal Beltech, one of the leading belting suppliers world-wide, offers a complete range of RAPPLON® elastic flat belts.

## Safe tracking and dimensional stability

The combination of dimensional stability with easy tracking makes this range absolutely maintenance-free. Just fit and forget! The selected prime materials to manufacture RAPPLON® elastic belts are highly reliable and demand lower tension which preserves your bearings, extending the overall lifetime of belt and equipment.



# RAPPLON® Elastic Belts

## Easy installation and safe tracking is our solution


### Easy and reliable splice

Our belt range distinguishes itself with a high end splicing quality thanks to carefully selected raw materials and our RAPPLON® QuickSplice joining system. Our unique, easy-to-use and fastest splicing method contributes to reduce your down-time at any time of day or night allowing your own staff to replace the belts. No need for costly outside-fitters anymore!

### Safe tracking and dimensional stability

The combination of dimensional stability with easy tracking makes this range absolutely maintenance-free. Just fit and forget! The selected prime materials to manufacture RAPPLON® elastic belts are highly reliable and demand lower tension which preserves your bearings, extending the overall lifetime of belt and equipment.

Our belts can be equipped with high grip cover XNBR elastomer ensuring extremely efficient operations or gentle cover made of fleece (non-woven) avoiding damaging of delicate goods during your process.

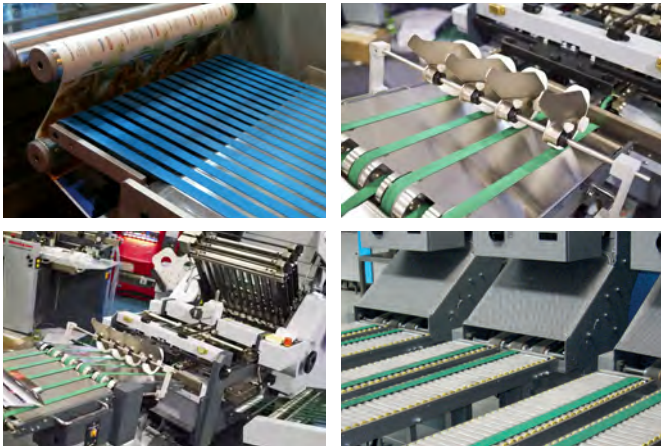

## Post Printing Applications

Trouble-free finishing of your printed products

RAPPLON® Elastic Belts are preferred specially in the mail room after the printing department. Thanks to their high grip and the optimal elasticity our belts fulfil exactly your demand ensuring highest efficiency at high speeds adapting itself perfectly to the diversity of your printed matters. Most machineries in this department are equipped with common shafts where only elastic belts come into consideration to operate without difficulty.

RAPPLON® Elastic Belts are your clever choice for any kind of light weight application in your mail room like feeding, inserting, punching, packaging, cutting, aligning, jogging, labelling, ... Replacing belts has become elementary thanks to our QuickSplice joining system and maintains your down-times to a minimum without need for external fitters or annoying dismantling of machines. Save time and money!



## Mail Sorting Applications

Handling letters efficiently and carefully

As one of the major suppliers to leading OEMs of integral letter sorting systems we continuously strive to meet exact demands of this industry.

RAPPLON® Elastic Belts are easy to fit on fixed shafts and handle mail pieces of varying thicknesses perfectly.

Our special gentle fleece cover avoids marking or damaging the letters on stackers. It also protects the letter when transported by the belt at the bull wheel section, compensating superbly the speed difference between outer and inner belt. The anti-static properties and specific surface finishes reduce dust generation and dust transfer while it facilitates releasing the processed letters safely. The effective black cover of our RAPPLON® GG N15 FFQ increases the functionality of video coding reading system due to less reflection and higher contrast.



# RAPPLON® TU N20 FQ

## An elastic belt with an extremely low friction running side

Transport belts running over slider beds demand low friction on the running side to minimise the wear specially on wider belts. Our RAPPLON® TU N20 FQ is composed of a polyamide fabric at the bottom side and handles conveyor duties perfectly without losing the known benefits of elastic flat belts.

Preserve your bearings and save energy thanks to the low load on shafts generated by this belt. The polyurethane conveyor surface is easy to clean and offers medium friction ensuring the necessary grip to transport different light materials.



*Perfectly flat laying belt guarantees trouble free operation*

### Unique features outstanding offering advantages for your benefit

Feature	Advantage	Benefit
High grip elastomer covers	High efficiency at high speed	Maximal output
No lifting of edges	Belt lays flat	Trouble-free operation
No elongation	No re-tensioning needed	Just fit and forget
High elasticity	Low load on shafts and bearings	Simple tracking and gentle on bearings
Fleece cover material	Medium friction and gentle	Not damaging nor marking papers and letters
QuickSplice Joining Technology	Easy and fast on-site belt splicing No glue required	Less down time maximising production output Highest safety for maintenance staff No need to dismantle machines
Antistatic properties	Avoiding electrostatic charges	Safety in dusty and dry environment

### Technical Data

Item code	RAPPLON® Belt description	Thickness in mm	K6% in N/mm dynamic	Recommended tension %	Min. pulley Ø at 20°C in mm	Thermal operational area in °C
54262	GG N08 RRQ	1.60	0.8	2.0-6.0	15	+0 / +60
54585	GG N15 FFQ	1.40	1.5	2.0-6.0	15	+0 / +60
54263	GG N22 RFQ	1.50	2.2	2.0-6.0	15	+0 / +60
54608	GG N27 RFQ	1.70	2.7	2.0-6.0	15	+0 / +60
54547	GV N20.17 RQ	1.70	2.0	0.5-2.0	15	+0 / +60
54557	UV N12 FQ	1.50	1.2	0.5-1.5	20	+0 / +60
54587	TU N20 FQ	1.25	2.0	2.0-6.0	20	+0 / +60

## Local Contacts

... and 150 more service contact points  
at [ammeraalbeltech.com](http://ammeraalbeltech.com)

### Argentina

T +54 11 4218 2906  
info-ar@ammeraalbeltech.com

### Australia

T +61 3 8780 6000  
info-au@ammeraalbeltech.com

### Austria

T +43 171728 133  
info-de@ammeraalbeltech.com

### Belgium

T +32 2 466 03 00  
info-be@ammeraalbeltech.com

### Canada

T +1 905 890 1311  
info-ca@ammeraalbeltech.com

### Chile

T +56 2 233 12900  
info-cl@ammeraalbeltech.com

### China

T +86 512 8287 2709  
info-cn@ammeraalbeltech.com

### Colombia

T +57 893 9890  
info-co@ammeraalbeltech.com

### Czech Republic

T +420 567 117 211  
info-cz@ammeraalbeltech.com

### Denmark

T + 45 7572 3100  
info-dk@ammeraalbeltech.com

### Finland

T +358 207 911 400  
info-fi@ammeraalbeltech.com

### France

T +33 3 20 90 36 00  
info-fr@ammeraalbeltech.com

### Germany

T +49 4152 937-0  
info-de@ammeraalbeltech.com

### Hungary

T +36 30 311 6099  
info-hu@ammeraalbeltech.com

### India

T +91 44 265 34 244  
info-in@ammeraalbeltech.com

### Israel

T +972 4 6371485  
info-il@ammeraalbeltech.com

### Italy

T +39 051 660 60 06  
info-it@ammeraalbeltech.com

### Japan

T +81 52 433 7400  
info-jp@ammeraalbeltech.com

### Luxembourg

T +352 26 48 38 56  
info-lu@ammeraalbeltech.com

### Malaysia

T +60 3 806 188 49  
info-my@ammeraalbeltech.com

### Mexico

T +52 55 5341 8131  
info-mx@ammeraalbeltech.com

### Netherlands

T +31 72 57 51212  
info-nl@ammeraalbeltech.com

### Poland

T +48 32 44 77 179  
info-pl@ammeraalbeltech.com

### Portugal

T +351 22 947 94 40  
info-pt@ammeraalbeltech.com

### Singapore

T +65 62739767  
info-sg@ammeraalbeltech.com

### Slovakia

T +421 2 55648541-2  
info-sk@ammeraalbeltech.com

### South Korea

T +82 31 448 3613-7  
info-kr@ammeraalbeltech.com

### Spain

T +34 93 718 3054  
info-es@ammeraalbeltech.com

### Sweden

T +46 44 780 3010  
info-se@ammeraalbeltech.com

### Switzerland

T +41 55 2253 535  
info-ch@ammeraalbeltech.com

### Thailand

T +66 2 902 2604-13  
info-th@ammeraalbeltech.com

### Turkey

T +90 232 877 0700  
info-tr@ammeraalbeltech.com

### United Kingdom

T +44 1992 500550  
info-uk@ammeraalbeltech.com


### United States

T +1 847 673 6720  
info-us@ammeraalbeltech.com


### Vietnam

T +84 8 376 562 05  
info-vn@ammeraalbeltech.com


**Expert advice, quality solutions  
and local service  
for all your belting needs**



Synthetic Belts



Engineered Belts



Endless Woven Belts



Homogeneous Belts



Modular Belts



Fabrication & Service

### General contact information:

**Ammeraal Beltech**  
P.O. Box 38  
1700 AA Heerhugowaard  
The Netherlands

T +31 (0)72 575 1212  
info@ammeraalbeltech.com

**ammera.com**